


Stainless steel WUFH manifold

Stainless steel manifolds are used as part of a wet underfloor heating system. They consist of two manifold bars, one for the flow and one for the return, complete with ball valves, drain/filling valves and air vents. On the flow bar each port has a Taconova flow indicator, with an isolator featuring an easy-to-read gauge glass. Each port on the return bar is equipped with an integral control valve and protection cap which allows the user to adjust the volume of water or can be removed to accept a manifold thermoelectric head.

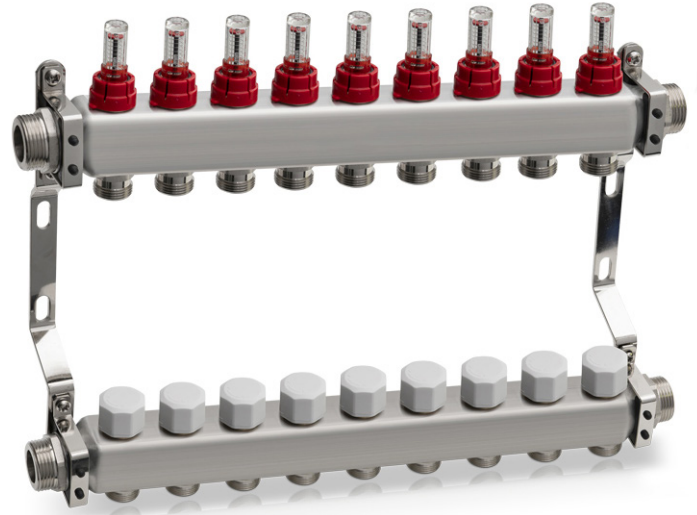

SPECIFICATIONS

- Maximum static pressure 10 bar
- Maximum temperature 90°C
- Connection sizes 1" FBSP


MATERIALS

- Manifold body Stainless steel AISI 304
- Mounting bracket Zinc plated steel
- Operating plastic ABS


FEATURES & BENEFITS

- Supplied pre-mounted on installation brackets
- Valves on return manifold accept a Manifold
- Thermoelectric head for remote control of each zone
- 1" ball valves, filling and drain-off points are included
- Euroconus connections. A range of fittings are available to suit most UK pipe sizes
- Taconova flow meters with isolating valves included

FLOW RATES

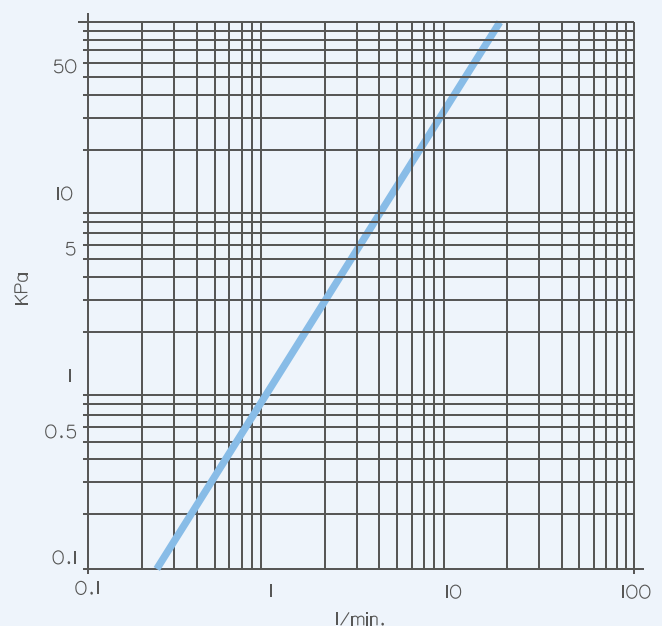

DIMENSIONS

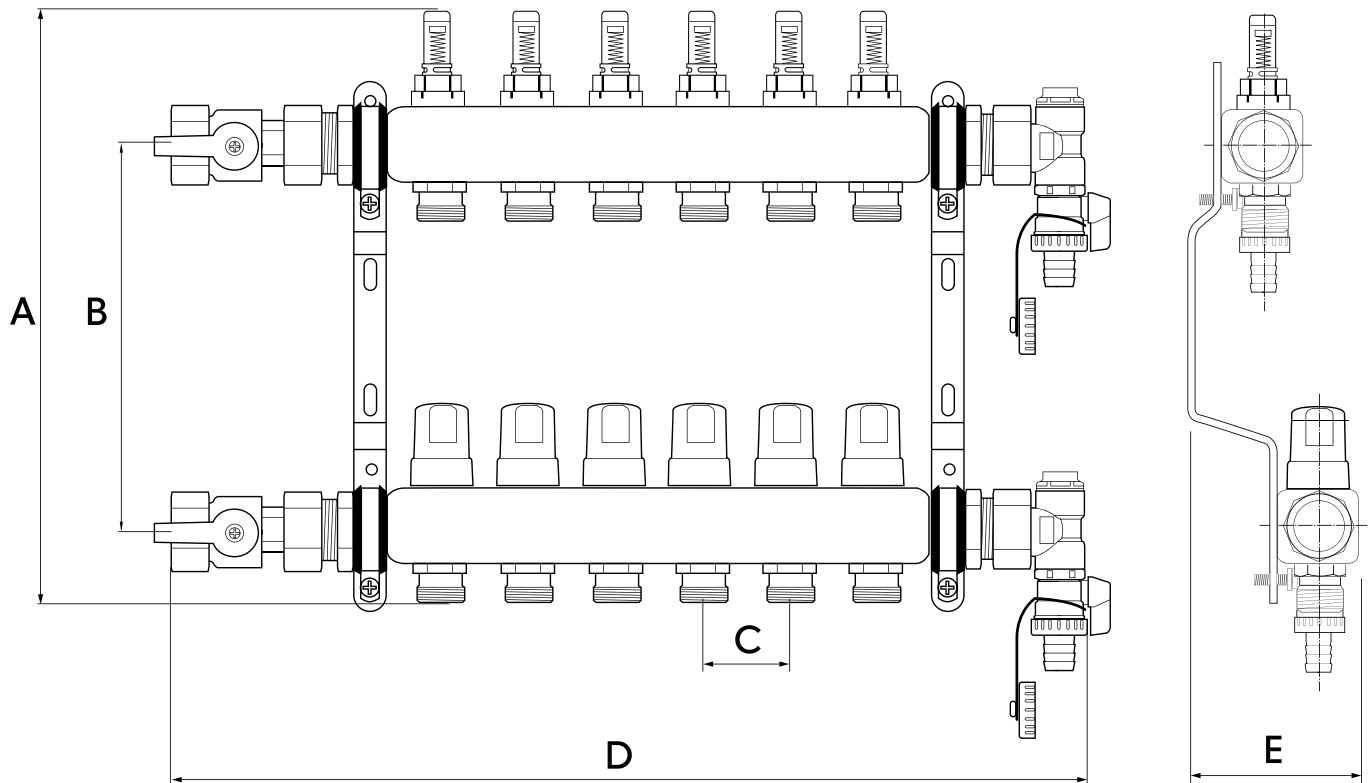

Part	Circuits	A	B	C	D	E
Manifold 2	2	320	210	50	276	90
Manifold 3	3	320	210	50	326	90
Manifold 4	4	320	210	50	376	90
Manifold 5	5	320	210	50	426	90
Manifold 6	6	320	210	50	476	90
Manifold 7	7	320	210	50	526	90
Manifold 8	8	320	210	50	576	90
Manifold 9	9	320	210	50	626	90
Manifold 10	10	320	210	50	676	90
Manifold 11	11	320	210	50	726	90
Manifold 12	12	320	210	50	776	90

All dimensions shown in mm unless otherwise stated

Edison House
 Edison Close
 Ransomes Europark
 Ipswich, Suffolk IP3 9GU
 United Kingdom

Tel: 01473 559088
 Fax: 01473 276678
 Email: info@harmoniheating.co.uk
 Web: www.harmoniheating.co.uk

harmoni
 wet underfloor heating