
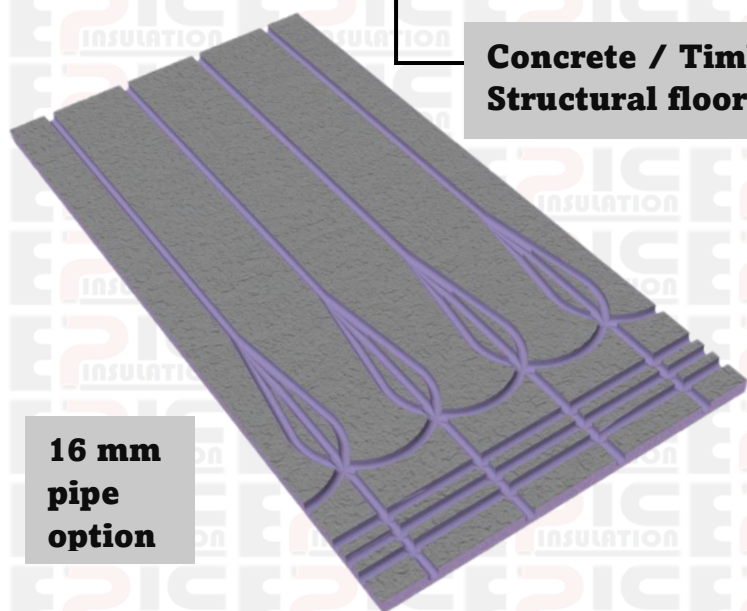


ProTile® Panel Overview

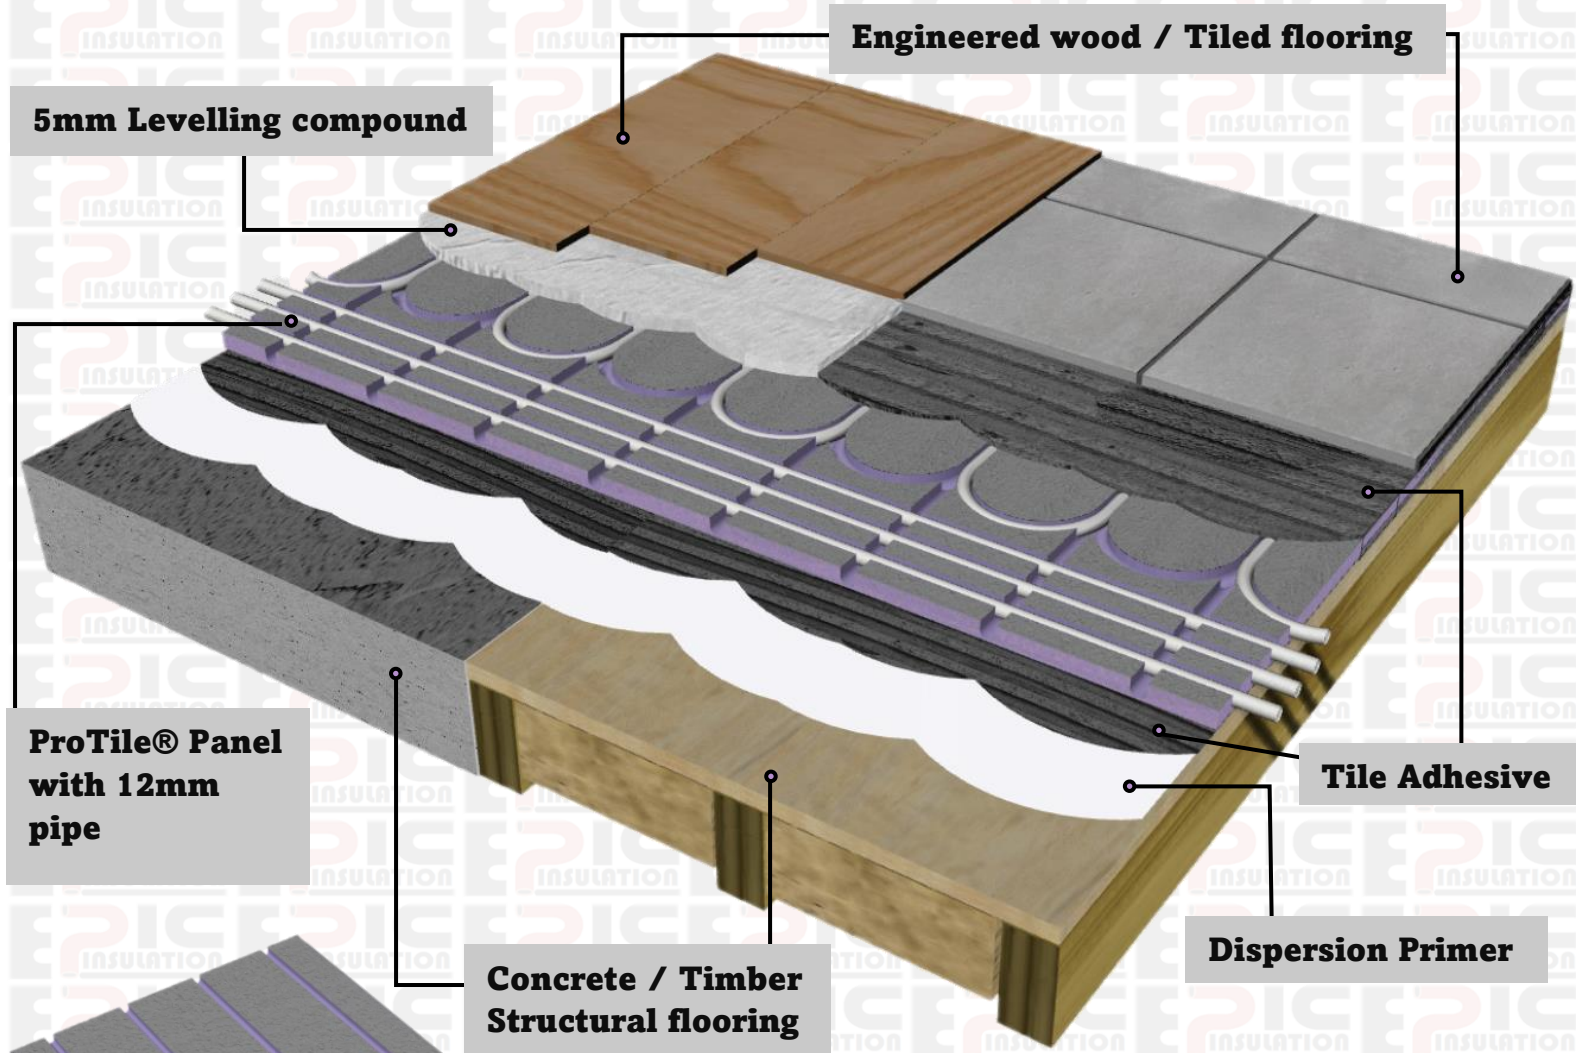

Key Points

- High Compressive Strength
- Easy Install
- Water Resistant
- Low Profile (20mm)
- Suitable for Direct tiling

Heat Outputs	40°C MWT	50°C MWT
Tiled flooring	67 W/mk 26.0°C	103 W/mk 29.0°C
Engineered wooden flooring (BONDED)	45 W/mk 24.0°C	65 W/mk 25.0°C