

## Description




- 2-way binary input sensor interface LUXORliving
- 4-pole cable connection
- Can be installed in flush-mounted sockets with conventional sensors/ switches
- Software functions: Switch/push-button, dimming, blinds
- Colour coding of wiring pairs

## Technical data

Operating voltage KNX	Bus voltage, ≤10 mA
Installation type	in flush-mounted socket
Number of inputs	2
Max. cable length	30 m
Length connecting wires	25 cm
Contact current	0,5 mA
Type of protection	IP 20
Protection class	III

## Connection example

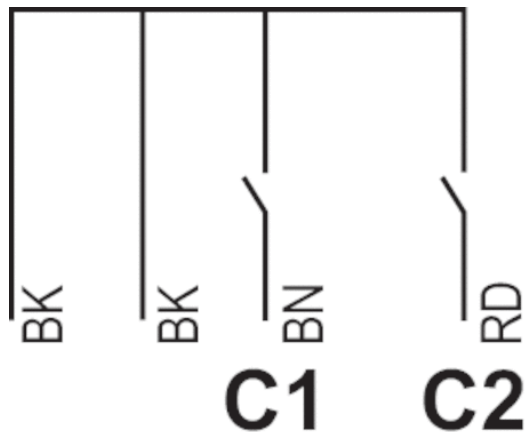

**Scale drawings**

